Electric towing tractor 3.0 - 5.0 ton Tracto

T3 series
T3-30
T3-50









www.cesab-forklifts.eu


CESAB


Towing truck

IDENTIFICATION				T3-30	T3-50
1.1	Manufacturer			CESAB	CESAB
1.2	Model			T3-30	T3-50
1.3	Drive			Electric	Electric
1.4	Operator type			Stand on	Stand on
1.5	Load capacity/rated load	Q	kg	3000	5000
1.7	Rated drawbar pull	F	N	1000	1150
1.9	Wheelbase	y	mm	1336	1336
WEIGHT					
2.1	Service weight including battery		kg	736	736
2.3	Axle load, without load, drive/support arm wheels		kg	679/390	740/360
WHELLS					
3.1	Drive / castor : fork wheels			Polyurethane	Polyurethane
3.2	Wheel size, front (drive)		mm	Ø 250x92	Ø 250x92
3.3	Wheel size, rear		mm	Ø 140x70	Ø 140x70
3.5	Wheels, number front/rear (x=driven wheels)			1(x)/2	1(x)/2
3.7	Track width, rear	b_{11}	mm	685	685
DIMENSIONS					
4.2.1	Overall height	h_{15}	mm	1350	1350
4.8	Stand height	h_7	mm	130	130
4.12	Coupling height				
	towing pin	h_{10}	mm	188/283/378	188/283/378
	towing ball	h_{10}	mm	253/393/533	253/393/533
4.19	Overall length	l_1	mm	1588	1588
4.21	Overall width	b_1/b_2	mm	790	790
4.32	Ground clearance, centre of wheelbase	m_2	mm	50	50
4.35	Turning radius	W_a	mm	1508	1508
4.44	Clear width driver compartment entrance	l_{24}	mm	458	458
PERFORMANCE DATA					
5.1	Travel speed, with/without load		km/h	6,0/12,0	6,0/12,0
5.6	Max. drawbar pull, with/without load		N	3200	3500
5.7	Gradeability, with/without load		%	see chart	see chart
5.10	Service brake			Electromagnetic	Electromagnetic
ELECTRIC MOTOR					
6.1	Drive motor rating S2 60 min		kW	2,8	2,8
6.4	Battery voltage, nominal capacity K5		V/Ah	24/500	24/500
6.5	Battery weight		kg	364	364
6.6	Energy consumption acc to EN16796 / ISO23308		kWh/h	TBD	TBD
OTHER					
8.1	Type of drive control			Variable AC	Variable AC
10.7	Sound level at the driver's ear according to EN12053		dB(A)	63	63


All data are based on table configuration. Other configurations may give other values.
Truck performance and dimensions are nominal and subject to tolerances.
CESAB products and specifications are subject to change without notice.


Dimensional drawings

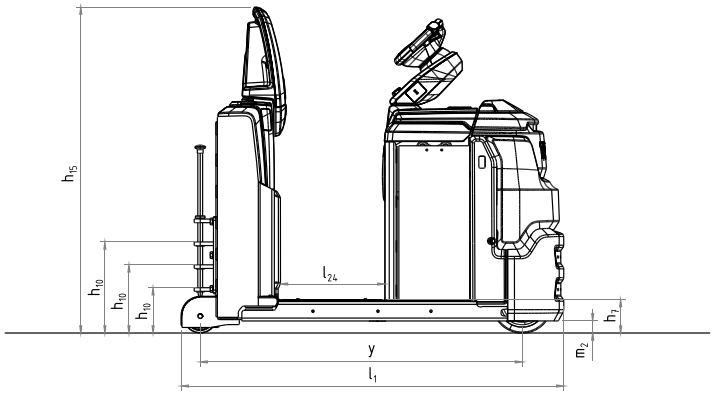

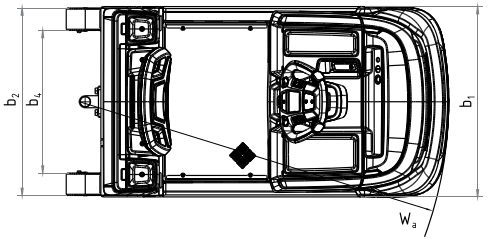



T3-30

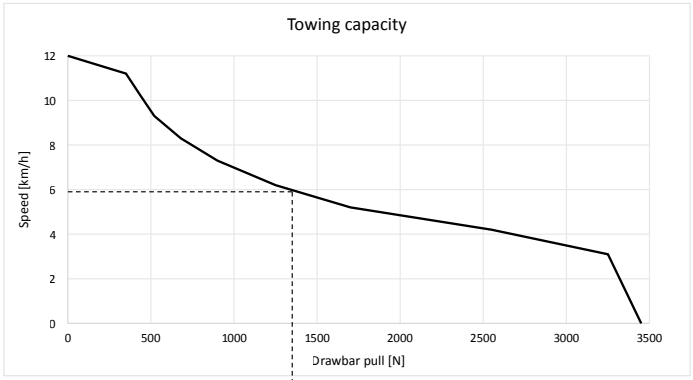

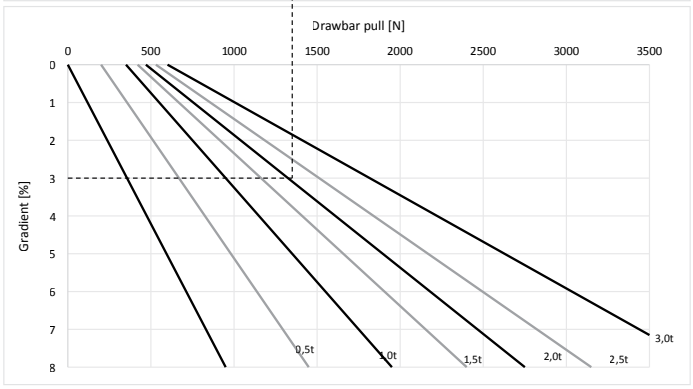

T3-50

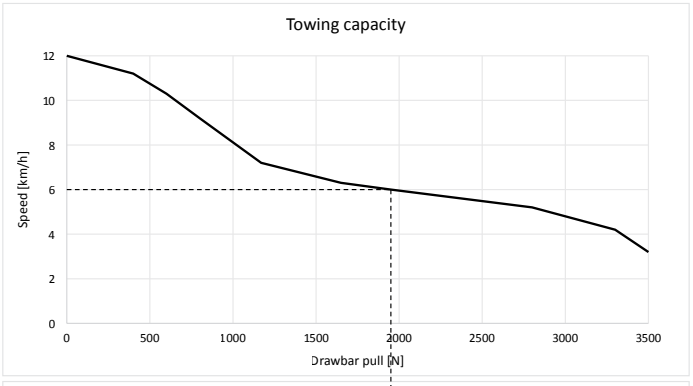

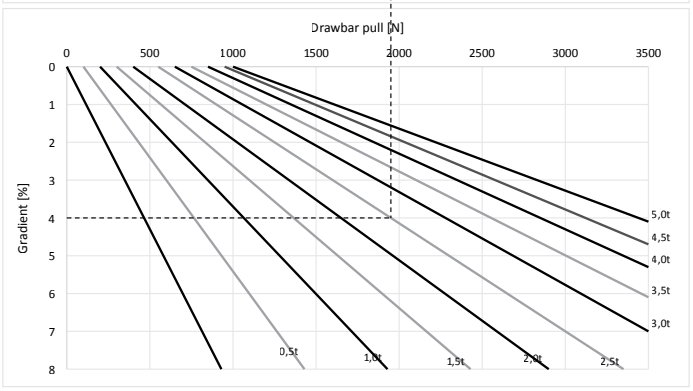

Standard equipments:

- High performance models
- E-man steering or E-Steer
- Low step-in
- AC Powerdrive system
- Integrated shrink film holder
- Smart truck with telematics hardware
- Inching buttons
- Extended variety of towing connections
- Optional E-bar for onvenient accessory mounting

CMHE-CESAB MATERIAL HANDLING EUROPE - version 1, 2026-10-30